

YONGNUO

LUX 160

摄像灯
Pro LED Video Light



使用说明书 User Manual

前言

感谢您使用LUX160摄像灯，在使用产品前，请认真阅读使用说明书。

注意事项

- 严禁将产品靠近或者投入火源，以避免发生火灾及爆炸等危险。
- 请勿私自拆卸产品，如产品出现故障须本公司或授权维修人员处理。
- 本产品运行时，请勿直视COB灯珠，勿遮挡散热孔，勿触摸COB灯珠；设备运行时，请勿直视光线。
- 请勿在易燃易爆和暴露雨中中使用。
- 当摄像灯出现高温报警时，请检查风扇是否出现故障。

产品规格

光源	1颗COB灯珠			
色温	双色版本：3200K-5600K；单色版本：5600K			
输出功率	LED：180W			
照度	距离	1M	2M	3M
	COB	35100Lux	6830Lux	2820Lux
重量	约5310克			
外接电池	26V/7A；14.8V/6A（V扣电池接口）			
外接电源	DC 24V/7.5A			
体积	590*240*250毫米			
遥控距离	小于50米			
平均寿命	50000小时			
光照角度	110°			
所含物品：摄像灯（1）、电源适配器（1）、V扣电池转接线（1）、标准罩（1）、抛物线柔光箱（1）、收纳包（1）、电池挎包（1）、挂绳（1）、蜂巢（1）。注：如有缺失请与经销商联系。				


注：使用14.8v的V扣电池时，最大功率限制为80w。使用26v的V扣电池时，最大功率限制为180w。

产品结构



安装与使用

1、使用配置电源适配器供电。

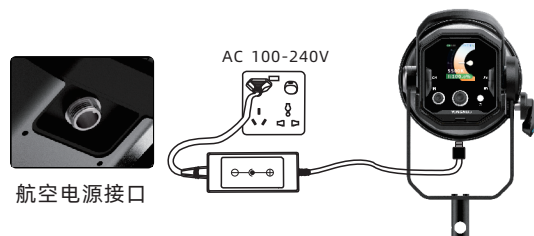

2、开机与关机。

按下开关机键进行开关机。



3、色温与亮度调节。

按下开机键摄像灯点亮，按下旋钮切换色温与亮度调节选项，旋转旋钮调节参数。



4、使用遥控器远程控制


按下遥控器锁扣取下遥控器，安装电池后即可远程控制摄像灯。长按关机键遥控器关机。

（注：取下遥控器时需要给遥控器安装两个AA（5号）电池，电池需另购）



5、切换频道。

按下<CH>按钮旋转确认键选择频道[CH]菜单，按下确认键旋转旋钮调节到您所需要的频道；按下确认键完成切换。（注：产品分为256个频道）



6、特效模式。

按下<Fx>按钮进入特效模式，旋转调节旋钮切换模式；按下确认键进入该特效模式；再次按下确认键暂停。按下左边旋钮切换速度和亮度选项，旋转调节参数。再次按下<Fx>切换到色温模式。

（注：按下<☰>菜单，选择<EN>切换中/英文显示。）





7、选择工作模式。

按下<  >按钮，选择确认键选择模式，按下确认键选择工作模式。




8、柔光箱的使用。

- 1)，利用支撑杆穿入柔光箱，再接入转盘撑起柔光箱。
- 2)，将柔光箱卡口接入摄像灯保荣卡口，接着向右钮紧完成安装；柔光布利用魔术贴粘合使用。




9、设置显示屏自动锁定时间。

按下<  >按钮旋转确认键选择[]菜单，旋转确认键选择时间，按下确认键设置完成。



10、数字显示模式。

按下<  >按钮旋转确认键选择[T]菜单；按下确认键完成切换此时显示界面进入数字显示模式。

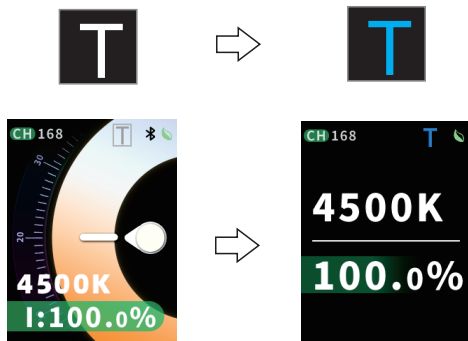

开启数字显示模式

11、手机APP与遥控器无线控制使用。

1) .按下<  >按钮旋转确认键选择蓝牙< >,按下确认键开启蓝牙；此时打开手机APP就可以自动连接摄像灯实现无线控制。

2) .2.4G无线控制模式可关闭。

3) .APP可以从永诺官网下载或通过扫描彩盒二维码点击下载。



蓝牙关闭



蓝牙开启



蓝牙已连接

本手册中的功能是依据本公司的测试条件获得，设计和规格如有变更，恕不另行通知。

深圳市永诺摄影器材股份有限公司

地址：深圳市坪山区坑梓街道深福保现代光学厂区A座

电话：（86）0755-83762448

传真：（86）0755-83762765

网址：www.hkyongnuo.com

生产地址：深圳市坪山新区坑梓街道锦绣中路14号

深福保现代光学厂区A栋厂房

售后电话：400-001-3888

Introduction

Thank you for using LUX160 LED video light. Please read the manual carefully before you use it.

Precautions

- Do not put the product close to or throw it into the fire source to avoid the danger of fire and explosion.
- Do not disassemble the product, maintenance or repair of this product should be handled by technical maintenance personnel of our company or authorized technical maintenance personnel.
- When the product is running, please do not look directly at the COB lamp beads, do not cover the heat emission hole, and do not touch the COB lamp beads; When the device is running, do not look directly at the light.
- Do not use this product in flammable and explosive place, or where it can be exposed to moisture.

Product specification

Color temperature version	One COB lamp bead			
Light Source	Bi-color: 3200k-5600k; White: 5600k			
Output power	LED: 180W			
100% illumination	Distance	1M	2M	3M
	COB	35100Lux	6830Lux	2820Lux
Weight	Approx 5310g			
Compatible batteries	26V/7A; 14.8V/6A (V-lock battery interface)			
External power source	DC 24V/7.5A			
Size	590*240*250MM			
Control distance	<50M			
Average Service Life	50000H			
Luminance Angle	110°			
Contents:Video light*1,Power adapter (1), standard cover (1), storage bag (1), V-port battery handbag(1), softbox (1) , V-port battery patch cord (1), lanyard (1)、Softgrid (1) . Note: Please contact your dealer if anything missing.				


Note: When using V-lock battery with 14.8V, the peak-power limitation is 80W. When using V-lock battery with 26V, the peak-power limitation is 180W.

Product structure



Installation and use

1. Use the configured power adapter for power supply.

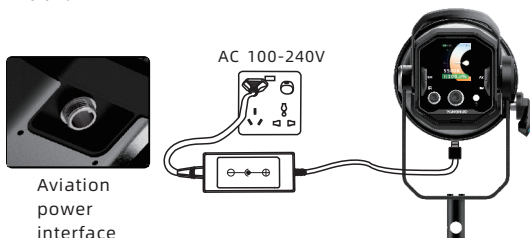

2. Power on and off

Toggle the Power ON&OFF button to switch the product on and off.



3. Color temperature and brightness adjustment
Press the power button to turn on the light, and press the knob to switch the color temperature and brightness options, rotate the knob to adjust the parameters.



4. Remote control

Press the lock button of the remote control to remove the remote control. After installing the battery, you can remotely control the video light. Long press the shutdown button to turn off the remote control. (Note: When using the remote control, two AA (No. 5) batteries should be installed on the remote control. The batteries need to be purchased separately.)



5. Switch channels

Press the button <CH> and toggle the confirm button to select the channel [CH] menu, then turn the knob to adjust the channel you want; press OK to complete the switch. (Note: The product provides 256 channels.)



6. Special scene modes

Press the button <Fx> to enter the special scene modes, and turn the knob to switch between modes; press the confirm button to enter the special scene modes, press confirm button again to pause. Press the left knob to switch the speed and brightness options, and turn the knob to adjust the parameters. Press <Fx> again to switch to the color temperature mode.

(Note: press <☰>, select <EN> to switch CH/EN Display)



7. Choose working mode.

Press the <☐> button, select the OK button to select mode, and press the OK button Select the working mode.




8. Use of softbox

1. Use the supporting rod to insert into the softbox, and then put in the rotary table to hold up the softbox.

2. Connect the mount of the softbox to the Bowens mount of the camera light, and then tighten to the right to complete the installation; And the soft light cloth is adhered with magic sticker.





9. Set the automatic locking time of the display. Press the < [☰] > button to rotate the confirm key and select [[]] menu, rotate the confirm key to select time, and press the confirm key to complete setting.



10. Digital display mode

Press the button < [☰] > and toggle the OK button to select the [T] menu, press OK button to complete the switch, and the display enters digital display mode.



Turn on digital display mode

11. Use via mobile APP and remote control for wireless control

- 1) Press the < [☰] > button < [⌘] > and toggle the OK button to select bluetooth, press OK button to turn on bluetooth; open the mobile APP, at this time the video light is connected automatically to realize wireless control.
- 2) You can purchase YONGNUO L01 touch remote to realize wireless control.
- (ON or OFF of 2.4G Wireless Control Mode.)
- 3) The APP can be downloaded from the YONGNUO official website or scanning the QR code on the gift box.



Bluetooth off



Bluetooth on



Bluetooth
connected

The functions in this manual are based on the test conditions our company. Further notice will not be given if the design and specifications change.