

YONGNUO

YN360 Mini



使用说明书

User Manual

前言

感谢您使用YN360Mini摄像灯，在使用产品前，请认真阅读使用说明书。

注意事项

- 严禁将产品靠近或者投入火源，以避免发生火灾及爆炸等危险。
- 请勿私自拆卸产品，如产品出现故障须本公司或授权维修人员处理。
- 请勿在易燃易爆和暴露在雨中使用。

产品规格

光源	180颗贴片灯与60颗RGB贴片灯			
色温	2700K-7500K和RGB全彩			
输出功率	LED：10W RGB:10W			
充电功率	Type-C电源输入 18W			
照度	距离	0.3M	0.5M	1M
	贴片灯	5158Lux	2057Lux	522Lux
	RGB	0.3M=3720Lux;0.5M=1517Lux;1M=401Lux.		
重量	约660克			
内置电池	7.2V/2600mAh/18.72Wh			
外接电源	USB Type-C电源 18W			
体积	350*70*70毫米			
遥控距离	小于15米			
平均寿命	50000小时			
光照角度	110°			
所含物品：摄像灯（1）、手绳（1）、格栅（1）、柔光布（1）、收纳包（1）、充电线（1）、铁片（2）。				
注：如有缺失请与经销商联系。				

产品结构



安装与使用


1、Type-C充电

充电过程中，显示屏电池显示闪电图标；指示灯亮红色，充满电后熄灭。产品支持USB-PD3.0快充协议。




当前亮度可使用时长

充电器输出
9-15V/2A




2、开机与关机。

拨动开关机键进行开关机。




3、2700K-7500K色温与亮度调节。

按下<Tem>按钮进入色温模式，按下确认键切换色温与亮度调节选项，旋转旋钮调节参数。

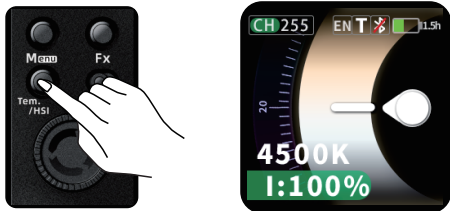

4、HSI调节模式。

按下<HSI>按钮进入HSI模式，按下确认键切换H:相位调节选项；S:饱和度调节选项；I:亮度调节选项，旋转旋钮调节参数。

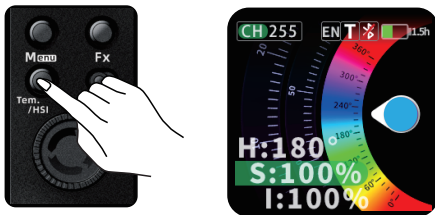

5、切换频道。


按下<Menu>按钮旋转确认键选择频道[CH]菜单，按下确认键旋转旋钮调节到您所需要的频道；按下确认键完成切换。（注：产品分为256个频道）



6、特效模式。

按<Fx>按钮进入特效模式，旋转调节旋钮切换模式；按下确认键进入该特效模式；再次按下确认键暂停。

（注：按下<MENU>菜单，选择<EN>切换中/英文显示。）

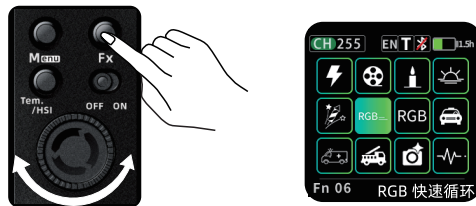



闪电



电影荧
幕反光



烛光



日出



烟花



RGB色域
快循环



RGB色域
慢循环



警车



救护车



消防车



狗仔队



频闪



SOS



高山紧急
求救信号



Psrtty1
(节奏快)



Psrtty2
(节奏慢)



火光场景



红色闪



绿色闪



蓝色闪



黄色闪



紫灯闪



青色闪



睡眠暖
色呼吸



温馨紫
色呼吸



红色
呼吸



绿色
呼吸



蓝色
呼吸



白灯
呼吸



黄灯
呼吸




色温循环

7、格栅与柔光布的使用。

1)，将摄像灯从格栅中间装入，利用格栅的魔术贴将灯与格栅固定。

2)，将柔光布从格栅正面装入使用。



8、磁铁的使用。



9、数字显示模式。

按下<Menu>按钮旋转确认键选择[T]菜单；按下确认键完成切换此时显示界面进入数字显示模式。



开启数字显示模式



开启数字显示模式

10、手机APP与遥控器无线控制使用。

1) .按下<Menu>按钮旋转确认键选择蓝牙,按下确认键开启蓝牙；此时打开手机APP就可以自动连接摄像灯实现无线控制。

2) .可选购永诺L01触摸遥控器实现无线控制。

(2.4G无线控制模式可关闭)

3) .APP可以从永诺官网下载或通过扫描彩盒二维码点击下载。



蓝牙关闭



蓝牙开启



蓝牙已连接

本手册中的功能是依据本公司的测试条件获得，设计和规格如有变更，恕不另行通知。

深圳市永诺摄影器材股份有限公司

地址：深圳市坪山区坑梓街道深福保现代光学厂区A座

电话：（86）0755-83762448

传真：（86）0755-83762765

网址：www.hkyongnuo.com

生产地址：深圳市坪山新区坑梓街道锦绣中路14号

深福保现代光学厂区A栋厂房

售后电话：400-001-3888

Introduction

Thank you for using YN360Mini LED video light. Please read the manual carefully before you use it.

Precautions

- Do not put the product close to or throw it into the fire source to avoid the danger of fire and explosion.
- Do not disassemble the product, maintenance or repair of this product should be handled by technical maintenance personnel of our company or authorized technical maintenance personnel.
- Do not use this product in flammable and explosive place, or where it can be exposed to moisture.

Product specification

Color temperature version	180 LED beads and 60 RGB SMD lamps			
Light Source	2700K-7500K and RGB full color			
Output power	LED: 10W RGB:10W			
Charging power	Type-C power supply 18W			
100% illumination	Distance	0.3M	0.5M	1M
	LED	5158Lux	2057Lux	522Lux
	RGB	0.3M=3720Lux;0.5M=1517Lux;1M=401Lux.		
Weight	Approx 660g			
Compatible batteries	7.2V/2600mAh/18.72Wh			
External power source	USB Type-C power supply 18W			
Size	350*70*70MM			
Control distance	<15M			
Average Service Life	50000H			
Luminance Angle	110°			
Contents:Video light*1,lanyard*1,Grate*1,Soft light cloth *1, Storage bag*1,USB cable*1, iron sheet*2.				
Note: Please contact your dealer if anything missing.				

Product structure



Installation and use


1、Type-C charging

During charging,the LCD screen displays the lighting icon,indicator light turns red;indicator light turns off after fully charged.The product supports USB-PD3.0 fast charging protocol.




Current Brightness Serviceable Time

Charger output
9-15V/2A




2、Power on and off

Toggle the Power ON&OFF button to switch the product on and off.



3、2700K-7800K color temperature and brightness adjustment

Press the button <Tem> to enter the color temperature mode,press the confirm button to switch the color temperature and brightness adjustment options,and turn the knob to adjust parameters.




4、HSI adjustment mode

Press the button <HSI> enter the HSI mode,and press the OK button to switch to H:phase adjustment option; S:saturation adjustment option;I:brightness adjustment option,and turn the knob to adjust parameters.




5、Switch channels

Press the button <Menu> and toggle the confirm button to select the channel [CH] menu, then turn the knob to adjust the channel you want; press OK to complete the switch. (Note: The product provides 256 channels.)



6、Special scene modes

Press the button <Fx> to enter the special scene modes, and turn the knob to switch between modes; press the confirm button to enter the special scene modes, press confirm button again to pause. (Note: press <MENU>, select <EN> to switch CH/EN Display)



Simulated lightning



Strobe



Cyan light Flash



Film screen reflection



SOS



Warm breathing light



Candlelight



Alpine emergency signal



Warm purple breathing light



Sunrise



Party1 (fast pace)



Red breathing light



Fireworks



Party2 (slow pace)



Green breathing light



RGB color gamut fast loop



Fire scene



Blue breathing light



RGB color gamut slow loop



Red light flash



White breathing light



Police car



Green light flash



Yellow breathing light



Ambulance



Blue light flash



color temperature cycle



Fire truck



Yellow light flash



Paparazzi



Purple light flash

7、The use of grid and soft light cloth

- 1) Install the video light from the middle of the grid, and use the rubber band to fix the video light and the grid.
- 2) Install and use the soft light cloth from the front of the grid.





8、The use of magnet



9、Digital display mode

Press the button <Menu> and toggle the OK button to select the [T] menu, press OK button to complete the switch, and the display enters digital display mode.



Turn on digital display mode



Turn on digital display mode

10、 Use via mobile APP and remote control for wireless control

1) Press the menu button < * > and toggle the OK button to select bluetooth, press OK button to turn on bluetooth; open the mobile APP , at this time the video light is connected automatically to realize wireless control.

2) You can purchase YONGNUO L01 touch remote to realize wireless control.

(ON or OFF of 2.4G Wireless Control Mode.)

3) The APP can be downloaded from the YONGNUO official website or scanning the QR code on the gift box.



Bluetooth off



Bluetooth on



Bluetooth
connected

The functions in this manual are based on the test conditions our company. Further notice will not be given if the design and specifications change.